


TECHNICAL DATASHEET

Part Numbers and Product Order Codes:-

| | | | | | | |
|---------------------------|---|---|---|---|---|----------------------|
| Part Number | - | - | - | - | - | STB-4SE |
| Description | - | - | - | - | - | Standard Deep Base |
| Device Type | - | - | - | - | - | Indoor mounting base |
| Computer Reference Number | | | | | | |
| Nittan Standard | - | - | - | - | - | F03_82300 |

Technical Specifications:-

| | | | | | | |
|---------------------------|---|---|---|---|---|--------------------------------|
| Operating Voltage | - | - | - | - | - | 12 to 38V d.c. |
| Operating Temperature | - | - | - | - | - | - 10°C to + 55°C |
| Storage Temperature | - | - | - | - | - | - 25°C to + 70°C |
| Relative Humidity | - | - | - | - | - | ≤ RH95% non-condensing. |
| Material | - | - | - | - | - | ABS |
| Dimensions | - | - | - | - | - | Ø104.50mm x 23.00mm |
| Mass | - | - | - | - | - | 78g |
| EMC Conformance | - | - | - | - | - | EMC conformance to BSEN50130-4 |
| CE Conformity | - | - | - | - | - | Yes |
| Standards / Certification | - | - | - | - | - | Complies with EN54-5,7 |

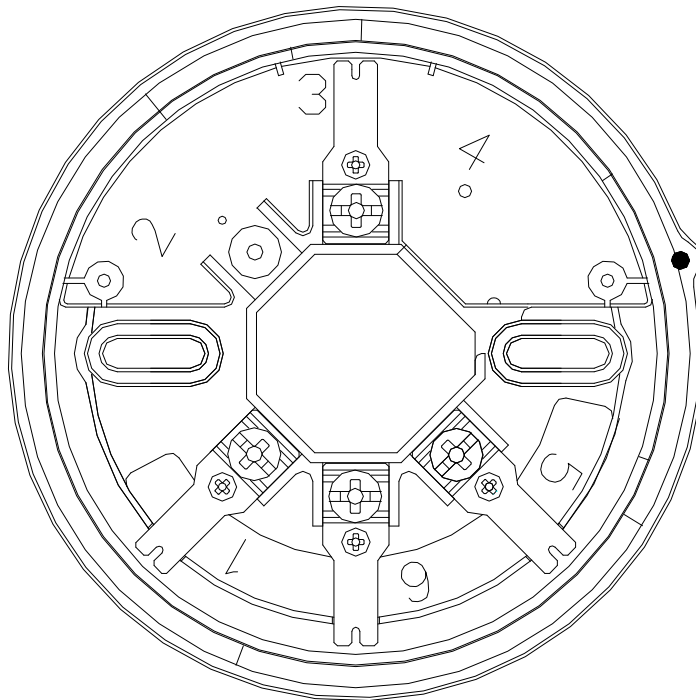

Conventional Termination

- 1 -VE in
- 3 +VE In/Out
- 5 RIL -VE 20mA Max
- 6 -VE Out

Analogue Termination

- 1 +VE
- 6 -VE
- 3 RIL -VE 2mA
- 5 Earth